


DIVA

Cod. DVSE080342


IP42
**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 140 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 12 H; minimum autonomy 3 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

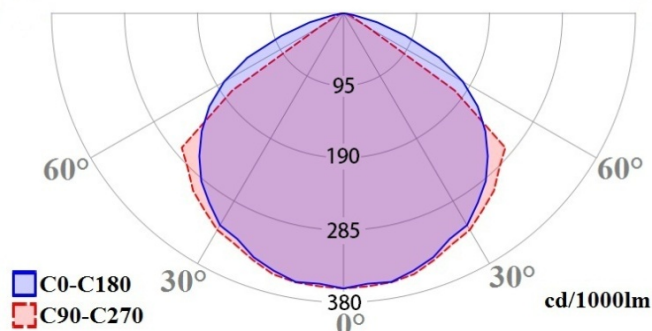
Description

Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	1 W
Current absorbed from Mains	120 mA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	12 H
Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	140 lm
Lum. flux in Maintained mode	-



DIVA

Cod. DVSE110242

CE  IP42**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 180 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 12 H; minimum autonomy 2 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

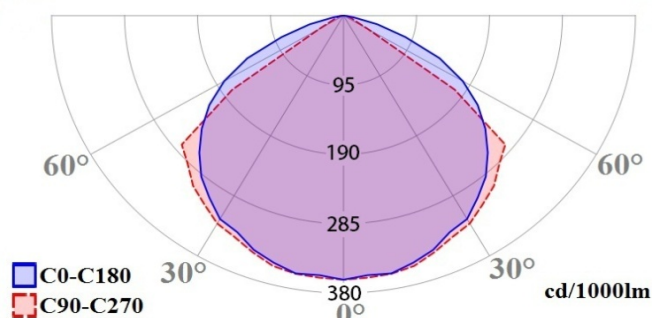
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	1 W
Current absorbed from Mains	120 mA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	2 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180 lm
Lum. flux in Maintained mode	-



DIVA

Cod. DVSE181542

CE  IP42**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 320 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 12 H; minimum autonomy 1.5 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

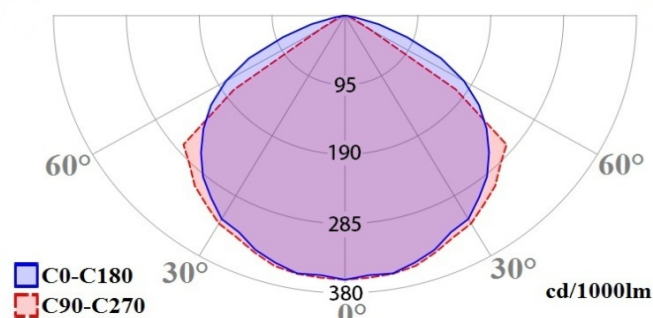
Description

Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	1 W
Current absorbed from Mains	120 mA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	1.5 H
Total charging time	12 H
Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	320 lm
Lum. flux in Maintained mode	-

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVSA080342

CE  IP42**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 140 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 3 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

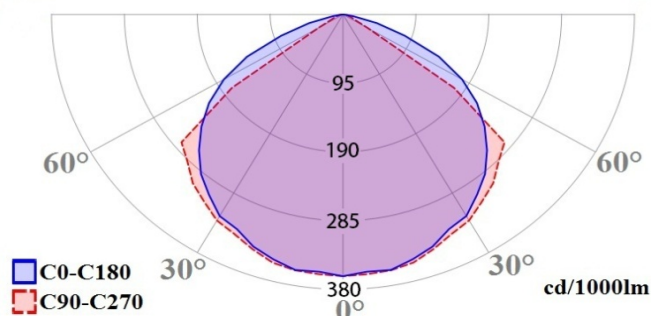
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	3.5 W
Maximum absorbed power in VA	5.8 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	140 lm
Lum. flux in Maintained mode	140 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVSA110242

CE  IP42**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 180 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 2 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

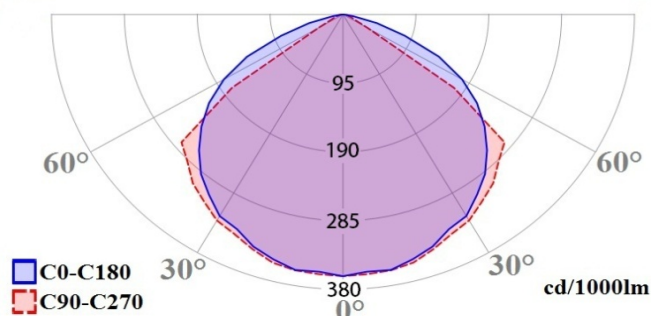
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	2 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180 lm
Lum. flux in Maintained mode	180 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVSA110342

CE  IP42**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 180 lm. N.2 rechargeable LiFePO₄ batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 3 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

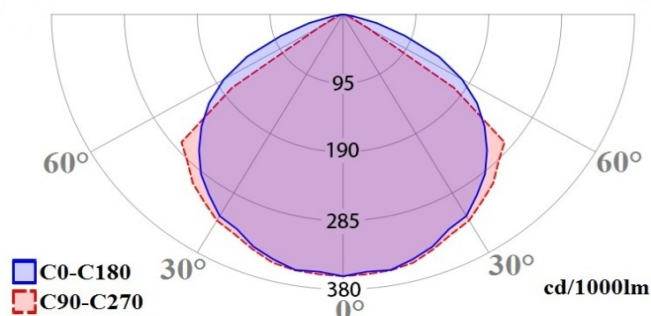
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.2 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180 lm
Lum. flux in Maintained mode	180 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVSA181542

CE  IP42**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 320 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 1.5 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

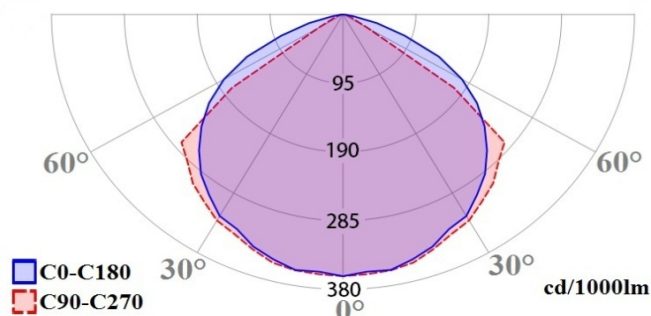
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	1.5 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	320 lm
Lum. flux in Maintained mode	180 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVSA180342

**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 320 lm. N.2 rechargeable LiFePO₄ batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 3 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

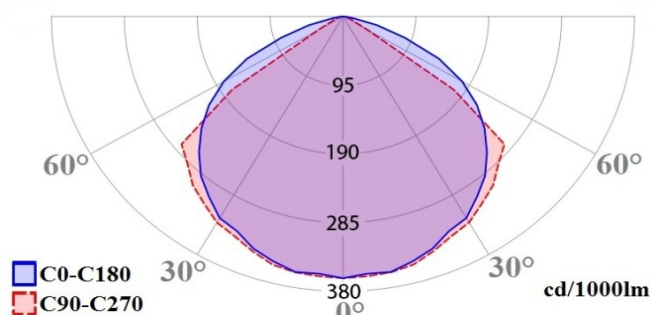
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.2 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	320 lm
Lum. flux in Maintained mode	180 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVSA241542

**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 400 lm. N.2 rechargeable LiFePO₄ batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 1.5 H. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

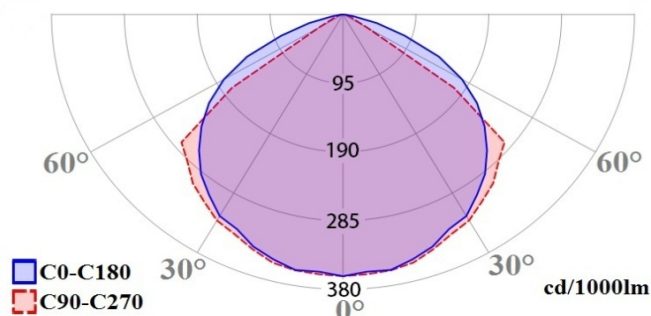
Product series	DIVA
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.5 W
Maximum absorbed power in VA	7.0 VA
Battery	N.2 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	1.5 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7


Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	400 lm
Lum. flux in Maintained mode	220 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVAA080342

**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 140 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 3 H. Function/Malfunction signalling LEDs. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

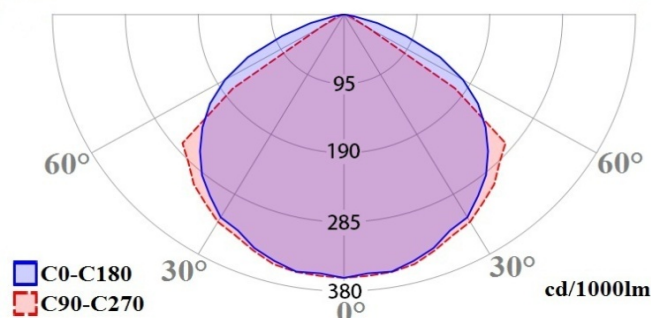
Product series	DIVA
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	3.5 W
Maximum absorbed power in VA	5.8 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034


Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	140 lm
Lum. flux in Maintained mode	140 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVAA110242

**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 180 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 2 H. Function/Malfunction signalling LEDs. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

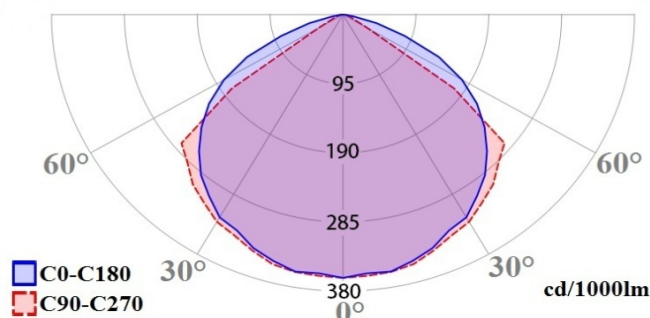
Product series	DIVA
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	2 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034


Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180 lm
Lum. flux in Maintained mode	180 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVAA110342

**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 180 lm. N.2 rechargeable LiFePO₄ batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 3 H. Function/Malfunction signalling LEDs. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

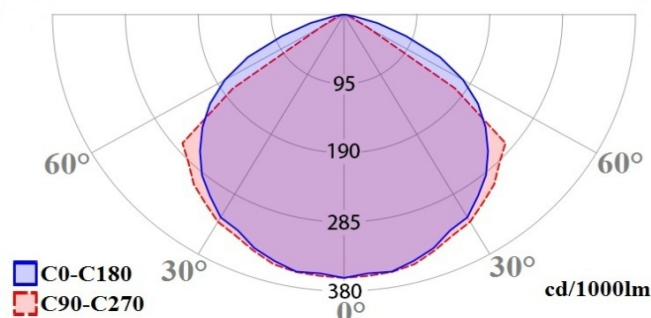
Product series	DIVA
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.2 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034


Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180 lm
Lum. flux in Maintained mode	180 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepredone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVAA180142

**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 320 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 1 H. Function/Malfunction signalling LEDs. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

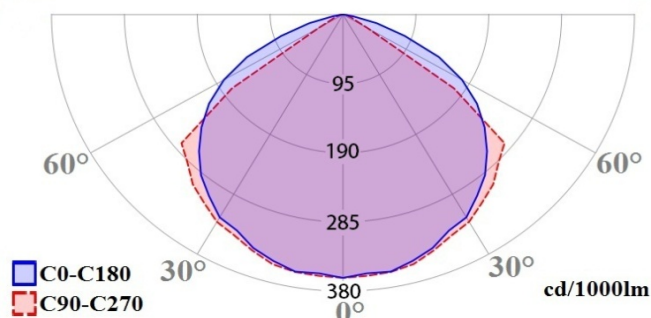
Product series	DIVA
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	1 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Morsetti dedicati per le funzioni di <i>inibizione e modo di riposo</i>
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	320 lm
Lum. flux in Maintained mode	180 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVAA180242

**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 320 lm. N.2 rechargeable LiFePO₄ batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 2 H. Function/Malfunction signalling LEDs. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

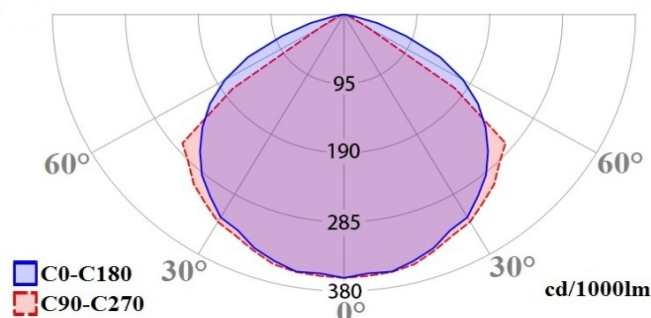
Product series	DIVA
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.2 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	2 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	320 lm
Lum. flux in Maintained mode	180 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepredone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVAA241542

**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 400 lm. N.2 rechargeable LiFePO₄ batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 1.5 H. Function/Malfunction signalling LEDs. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

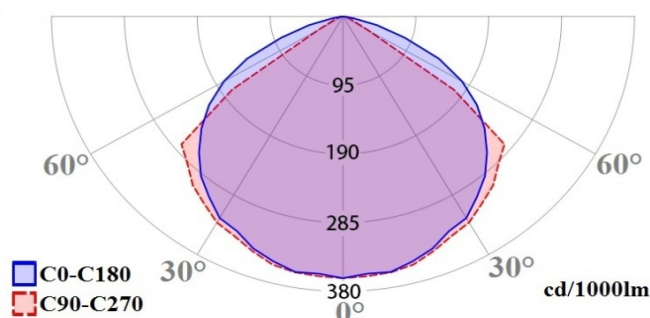
Product series	DIVA
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.5 W
Maximum absorbed power in VA	7.0 VA
Battery	N.2 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	1.5 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Morsetti dedicati per le funzioni di inibizione e modo di riposo
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034


Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	400 lm
Lum. flux in Maintained mode	220 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVBA080342

**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 140 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 3 H. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

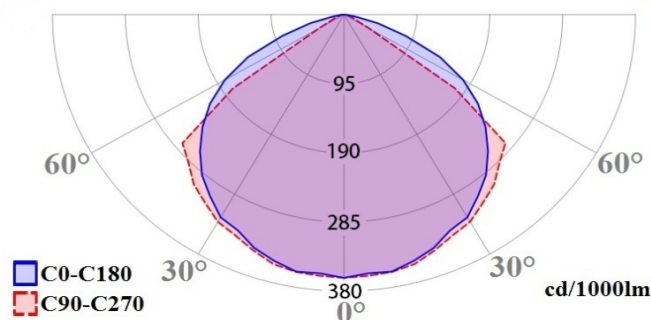
Product series	DIVA
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	3.5 W
Maximum absorbed power in VA	5.8 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034


Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	140 lm
Lum. flux in Maintained mode	140 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVBA110242

**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 180 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 2 H. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

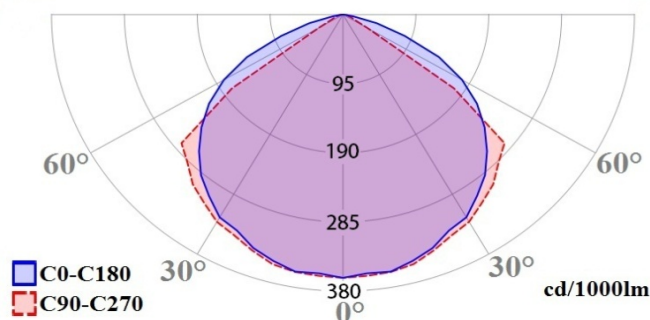
Product series	DIVA
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	2 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034


Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180 lm
Lum. flux in Maintained mode	180 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVBA110342

**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 180 lm. N,2 rechargeable LiFePO₄ batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 3 H. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

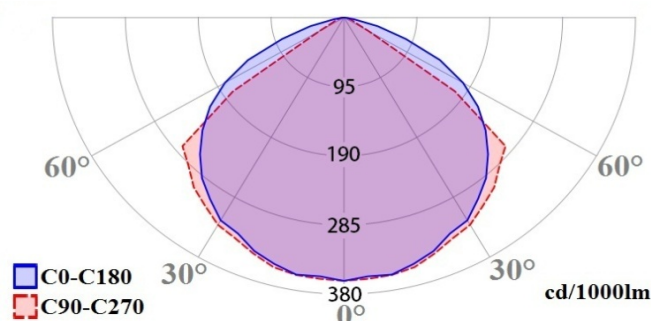
Product series	DIVA
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N,2 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	3 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034


Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180 lm
Lum. flux in Maintained mode	180 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVBA180142

**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 320 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 1 H. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

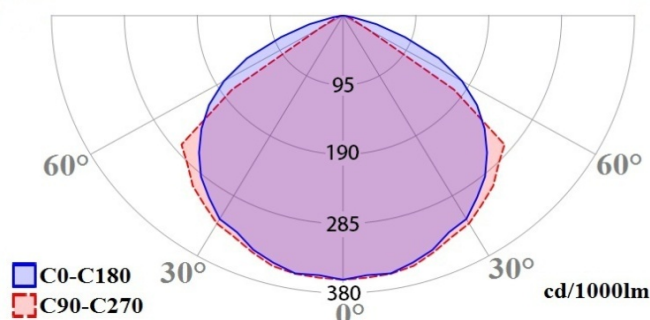
Product series	DIVA
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	1 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034


Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	320 lm
Lum. flux in Maintained mode	180 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVBA180242

**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 320 lm. N.2 rechargeable LiFePO₄ batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 2 H. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

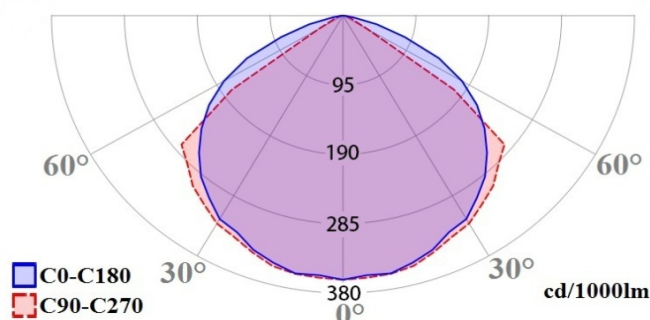
Product series	DIVA
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.2 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	2 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034


Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	320 lm
Lum. flux in Maintained mode	180 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVBA241542

**Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 400 lm. N.2 rechargeable LiFePO₄ batteries @ 1.5 Ah included; charging time 12 H; minimum autonomy 1.5 H. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

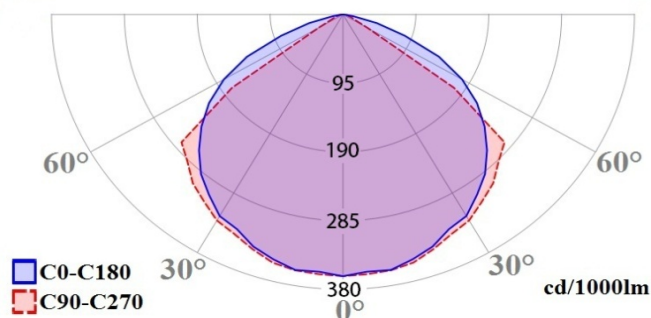
Product series	DIVA
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.5 W
Maximum absorbed power in VA	7.0 VA
Battery	N.2 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	1.5 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Maintained mode information	Dedicated terminal 230 V~
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034


Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	400 lm
Lum. flux in Maintained mode	220 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DIVA

Cod. DVLA080042

**Introduction**

DIVA series LED emergency light for centralized power supply system with self-extinguishing RAL9003 white polycarbonate body and ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Luminous flux 140 lm. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

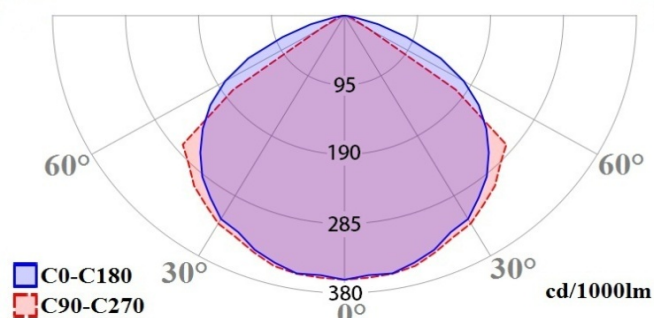
Product series	DIVA
Product type	Emergency luminaire
Version	Central Battery (alimentazione centralizzata)
Type	-
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	2.0 W
Maximum absorbed power in VA	3.4 VA
Battery	-
Autonomy	-
Total charging time	-


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	6000K
Luminous flux	140 lm



DIVA

Cod. DVLA110042

**Introduction**

DIVA series LED emergency light for centralized power supply system with self-extinguishing RAL9003 white polycarbonate body and ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Luminous flux 180 lm. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

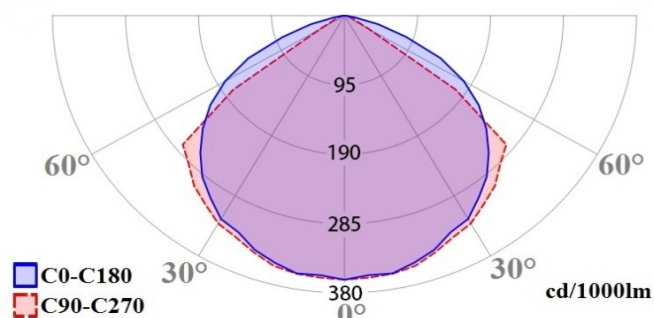
Product series	DIVA
Product type	Emergency luminaire
Version	Central Battery (alimentazione centralizzata)
Type	-
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	2.5 W
Maximum absorbed power in VA	4.2 VA
Battery	-
Autonomy	-
Total charging time	-


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	6000K
Luminous flux	180 lm



DIVA

Cod. DVLA180042

**Introduction**

DIVA series LED emergency light for centralized power supply system with self-extinguishing RAL9003 white polycarbonate body and ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Luminous flux 320 lm. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

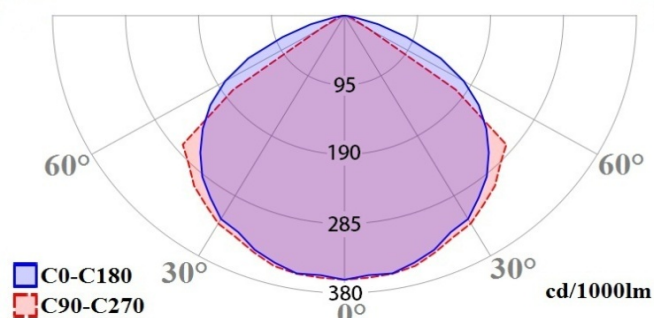
Product series	DIVA
Product type	Emergency luminaire
Version	Central Battery (alimentazione centralizzata)
Type	-
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.5 W
Maximum absorbed power in VA	7.5 VA
Battery	-
Autonomy	-
Total charging time	-


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	6000K
Luminous flux	320 lm



DIVA

Cod. DVLA240042

**Introduction**

DIVA series LED emergency light for centralized power supply system with self-extinguishing RAL9003 white polycarbonate body and ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Luminous flux 400 lm. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 40 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

Product series	DIVA
Product type	Emergency luminaire
Version	Central Battery (alimentazione centralizzata)
Type	-
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	5.8 W
Maximum absorbed power in VA	9.7 VA
Battery	-
Autonomy	-
Total charging time	-

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 40°C
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	6000K
Luminous flux	400 lm

