

584503-W

Wireless 3V ShatterPro II with "Pattern Recognition Technology" 360' 7.5m radius range



584503-W

Wireless 3V ShatterPro II with "Pattern Recognition Technology" 360' 7.5m radius range

Technical specifications

General

Technology	Acoustic
Glass types	Laminated, Plate, Tempered, Wired
Range	6m radius
Tamper switch	Yes

Wired/wireless

Wired-wireless	OEM
----------------	-----

Electrical


Operating voltage	2.8 to 4.5 VDC
Power supply value	2.8 to 4.5 VDC
Power consumption	17µA typical
Current consumption	17µA typical

Physical

Physical dimensions	108 x 80 x 43 mm
Colour	White
Mounting type	Surface mount

Environmental

Operating temperature	-10° to +50° C
-----------------------	----------------

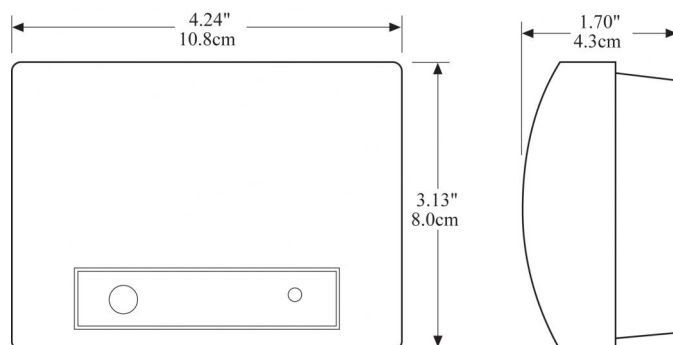

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 15 July 2019 - 14:23

