#### **Product data sheet**



### TVW-6101

# TruVision HD-TVI Analog Wedge Camera, 1080p or 960H, 2.8 mm lens, true D/N, WDR, 10 m IR, IP66

#### Overview

The TruVision® HD-TVI Analog Wedge Camera by Interlogix delivers cost effective surveillance with high resolution HD-TVI 1080p image or 960H analogue quality over existing coaxial cable. This camera also has the ability to see in low-light conditions providing colour images by day and black-and-white images in night-time applications (in conjunction with IR illumination).

Along with an IP66 rating for outdoor installation, it is also IK8 rated for impact resistance.

With quick and easy installation, the HD-TVI Wedge Camera is ideal for new or existing projects and helps users stay within budget constraints without compromising security needs.



#### **Details**

- 1080p HD or Analogue 960H resolution
- HD-TVI technology for transmitting HD quality video over existing coax cable
- True day/night functionality and infrared illuminators with Smart IR function for capturing images in various lighting scenarios
- IR range of up to 10 m
- IP66 environmental rating
- True WDR (120 dB)
- 2.8 mm fixed lens
- 12 VDC
- OSD control viaTruVision up the coax and built-in menu button
- IK8 vandal rating

## TVW-6101

# TruVision HD-TVI Analog Wedge Camera, 1080p or 960H, 2.8 mm lens, true D/N, WDR, 10 m IR, IP66

#### **Technical specifications**


General	
Technology	HD-TVI analog
Video standard	PAL
OSD	Text Overlay
Image settings	Mirror
Privacy masking	4 programmable privacy masks
Video output	BNC Composite, HD-TVI
Camera	
Max. resolution	1080p
Sensor scan	Progressive
Sensor type	CMOS
Total Pixels (H x V)	1920 x 1080
Effective pixels (H x V)	1920 x 1080
Digital S/N ratio	62dB
Shutter time	NTSC: 1/30s to 1/50,000s PAL: 1/25s to
	1/50,000s
Lighting performar	nce
WDR	120 dB with HD-TVI output
Digital noise reduction	3DNR
Day/night	True Day/Night
Motorized IR cut filter	Yes
Color sensitivity	0.005 Lux (F1.2, AGC ON)
B/W sensitivity	0 Lux with IR
Infrared (IR)	Yes
R range	10m
Lens	
Lens type	Fixed
Focal length	2.8mm
f-stop	F1.2
Auto iris	No
Auto focus	No
Storage	
Local storage support	No
Video intelligence	
Alarm trigger	Motion detection, Privacy Masking
Video analytics	Smart IR
Electrical	
Operating voltage	12 VDC
Power consumption	3.5W
Current consumption	0.29A
Physical	
Physical dimensions	97 × 46.8 × 99.5 mm
Net weight	260 g
Form Factor	Wedge
	<u> </u>

Environmental		
Impact rating	IK8	
Environment	Indoor / Outdoor	
Operating temperature	-40 °C to 60 °C	
Relative humidity	<90%	
IP rating	IP66	
Regulatory		
Compliancy	CE, FCC, REACH, RoHS, UL	
Certification	CE	
Accessories		
TVD-CB2	TruVision Dome 2" Cup Base	
DR-RWM	TruVision Wall Mount (use w/DR-RWM-AD Wedge Adapter Plate)	
DR-RWM-AD	Adapter for TruVision Wedge or Plastic Dome to DR-RWM or TVD-M2-WM Wall Mounts	
TVD-BB3	TruVision Dome Back Box (use w/DR-RWM-AD Wedge Adapter Plate)	
TVD-LWB-1	TruVision Dome Bracket, L-Shape (for Analog/ IP Wedge and Analog/HD/IP Plastic Dome Cameras)	
TVD-PPB	TruVision Dome Pendant-Mount Bracket (use w/ TVD-CB2)	
TVD-SNB	TruVision Dome Swan Neck Bracket (use w/ TVD-CB2)	
TVW-DVM	TruVision Dual View Mount for Wedge Cameras (use w/TVD-PPB)	
TVD-M2-WM	TruVision Dome Wall Mount (use w/TVD Analog/ HD-TVI/IP VF Dome; Fixed Lens HD-TVI/IP Dome and IP Wedge via DR-RWM-AD)	
TVW-AWB-1	TruVision Outdoor Angled Back Box for Wedge Cameras	
TVW-AWB-2	TruVision Indoor Angled Back Box for Wedge Cameras	
TVW-2G-AD	TruVision Double Gang Box Adapter Plate for	

Wedge Cameras

## TVW-6101

Tru Vision HD-TVI Analog Wedge Camera, 1080p or 960H, 2.8 mm lens, true D/N, WDR, 10 m l R, IP66  $\,$ 

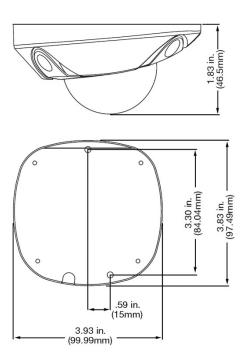



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.