

# AD011

## External addressable device interface



### Details

---

- 2/4 wire external interface
- One EOL inputs to monitor alarm and tamper relay
- One output to trigger the LED
- If needed powered through auxiliary power supply
- Used for any sensor

# AD011

## External addressable device interface

### Technical specifications

#### General

Accessory group	Motion sensors
Type	Module

#### Electrical

Operating voltage	12 VDC 24 VDC
Current consumption	520 $\mu$ A current consumption from bus

#### Physical

Physical dimensions	70 x 82 x 31 mm
Colour	White

#### Environmental

Environment	Indoor
-------------	--------

#### Bus protocol

	Interlogix property
--	---------------------

#### Bus voltage

	12 VDC or 24 VDC
--	------------------

#### External power supply

	9.0 to 13.8 VDC
--	-----------------

#### Current consumption from Bus

	520 microA +/-10%
--	-------------------

#### Unit load for DGP

	2
--	---

#### Address range

	0 to 255
--	----------

#### Open collector current output


	100 microA max.
--	-----------------

#### EOL resistor

	2 x 4k7
--	---------

#### Dimensions (W x H x D)

	70 x 82 x 31 mm
--	-----------------

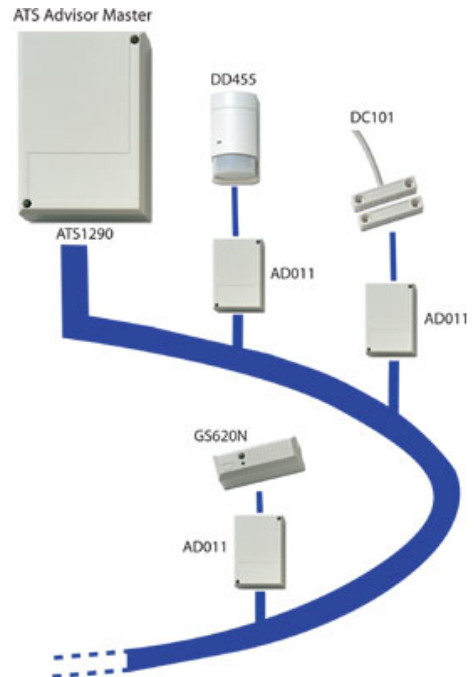

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](http://firesecurityproducts.com) online or contact your sales representative.

Last updated on 22 April 2021 - 18:21

