


AD1000

Plug-in module EV/VE/DD1000

The AD1000 IADS module is supported by the ATS1290N DGP, and designed to be installed directly on the terminal block of the following detectors: EV1000 series / VE1000 series / DD1000 series (standard as well as AM variants).

A 3 core connection only is required to the ATS1290N DGP / ATS Master panel.

As the AD1000 acts as I/O interfaces with one dual-zone input and two outputs, it is necessary to program anti-masking detectors to signal a technical fault or antimasking condition to the alarm output.

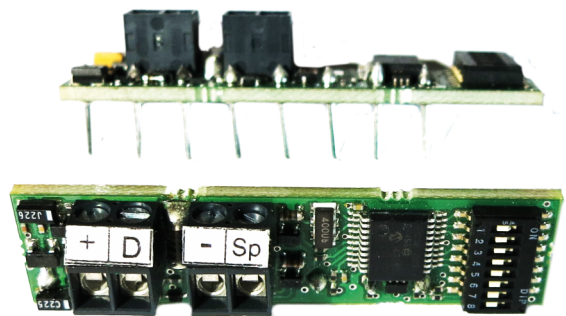

Details

- Helps reduce installation time
- Up to 32 addresses can be set
- Fits into motion sensor connector block
- Supported by ATS1290N DGP

AD1000

Plug-in module EV/VE/DD1000

Technical specifications

General

Accessory group	Motion sensors
Type	Module

Electrical

Operating voltage	9 to 24 VDC
Current consumption	max. 900 μ A

Supply voltage

9 to 24 VDC (12 V nominal)

IADS-bus voltage

12 or 24 VDC

Min. current consumption at 13.4 VDC

400 μ A

Max. current consumption at 13.4 VDC

900 μ A

Bus current consumption out of bus

approx. 75 μ A

Max. current capacity output day/night

200 mA

Max. current capacity output walk test

200 mA

Device type / Category

T3 / PIR

Address range

0 to 31



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 26 March 2021 - 12:38