

# ATS1482

## ATS Reader Address Configuration Card for ATS116x and ATS118x range Mifare Readers


### Product Overview

---

The ATS1482 reader configuration card allow for an operator to specify the reader address of ATS116x range and ATS118x range of readers without any programming device or menu configuration.

The reader address easily can be changed, by just badging at reader that needs to be changed.

Instructions are at the back of the card.

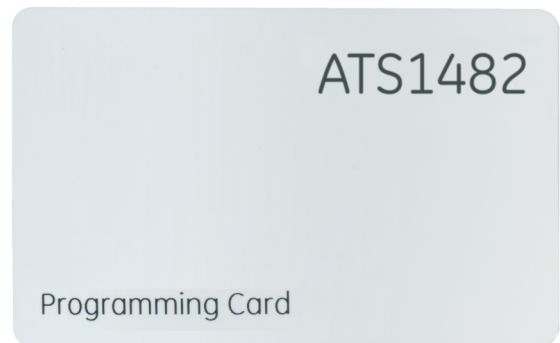

### Details

---

- Instructions on flip side of the card

# ATS1482

## ATS Reader Address Configuration Card for ATS116x and ATS118x range Mifare Readers

### Technical specifications

---

#### Technology

Credential type	Configuration Card, Proximity
Credential operating frequency	13.56 MHz

---

#### System

Custom data model	No
Supported readers	ATS ATS118x Secure Readers, ATS1160/1161 Mifare Readers

---

#### Printing

Direct surface printing	Yes
-------------------------	-----

---

#### Ordering information

Minimum order quantity	1
Cards/tags in package	1

---

#### Physical

Material	PVC
Form factor	CR80 (Credit)
Physical dimensions	86 x 54 mm
Colour	White
Card Label	Programming Card

---



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](http://firesecurityproducts.com) online or contact your sales representative.

Last updated on 8 July 2021 - 10:12