

ATS1801

ATS computer and printer interface

Product overview

The optional ATS1801 computer & printer interface allows a 24h/24h RS232 connection to a PC running TITAN. It is also used to connect the IP interface (ATS1806/ATS1809) for IP reporting or connection to the management system via IP.


Mounting

Power must be disconnected from the ATS control panel before the ATS1801 is plugged in.

ATS1801 computer and printer interface plugs into the control panel J11 connector.

Cabling

4-core shielded RS232 data cable is used to connect port A or port B to the computer and printer (not twisted pair). e.g. WCAT 52/54. Maximum cable length is 15 m. If the distance to the PC is higher, with the help of the ATS1741 it can be extended up to 1.5 km.

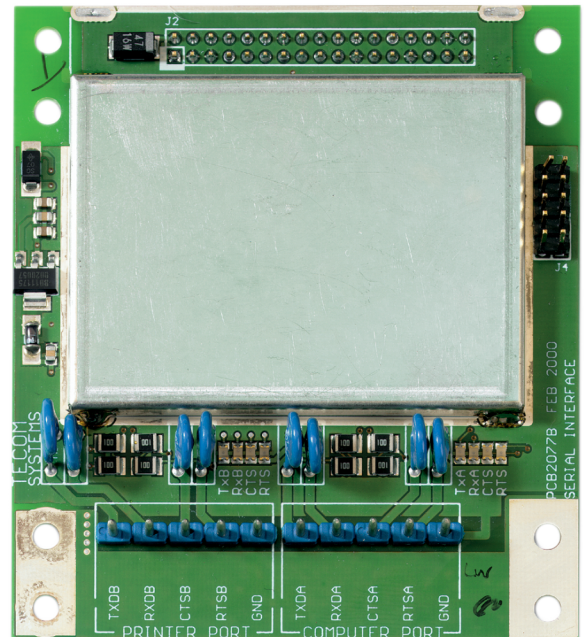

Details

- RS232 interface for ATS control panel
- Can connect either to a PC or to a printer
- Suitable for permanent connection
- In combination with ATS1806/ATS1809 provide IP connectivity for ATS control panel

ATS1801

ATS computer and printer interface

Technical specifications

General

Accessory group	ATS Master
Type	Module

Electrical

Current consumption	25 mA (standby)
	150 mA (both ports active)

Physical

Physical dimensions	90 x 86 mm (W x H)
---------------------	--------------------

Environmental

Operating temperature	0 to +50°C
Relative humidity	95% noncondensing

