

# DC408

## Industrial floor mount contact for garage door, high security grade 3, grey

### Requirements for grade 3 magnetic contacts


---

The grade 3 magnetic contacts are high security contacts which do meet the following requirements: preciseness of opening distance, magnet polarisation, strength of the magnet

### Model with built in EOL resistors available

---

Though built in EOL resistors are not mandatory according to EN50131-2.6 requirements, Interlogix offers a model with built in EOL resistors for a quick installation (see how to Order information)

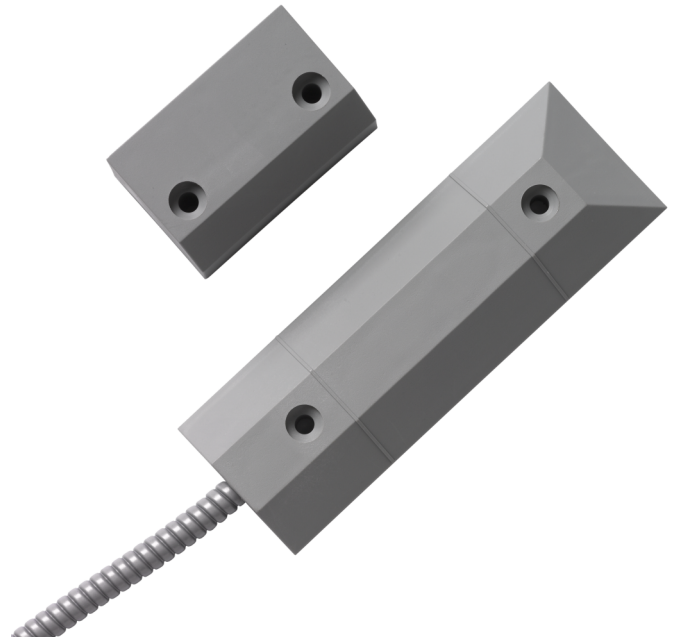

### Details

---

- EN 50131-2-6 Grade 3 and VDS certified
- 2m cable
- Tamper protected

# DC408

## Industrial floor mount contact for garage door, high security grade 3, grey

### Technical specifications

---

#### General

Application type	Surface Mount
Contact type	1 pin NC contact
Connectivity	LIYY 4 x 0.14 mm Cu tin-plated; Suitable for LSA IDC method of termination

---

#### Wired/wireless

Wired-wireless	Wired
----------------	-------

---

#### Electrical

Voltage	max 100V DC
Contact power	max 6W or 6 VA
Switching current	max 500mA
Contact resistance	max 0.15 Ohm

---

#### Physical

Physical dimensions	66 x 40 x 35 mm
Colour	Grey
Material	Polyamid GF
Dimensions magnet	12 x 55 mm
Dimensions contact / sensor	144 x 50 x 16.5 mm
Operating gap	34 mm

---

#### Environmental

Operating temperature	-25 to 70°C
Environment	VdS ; Class III - Outdoor (Sheltered)
IP rating	IP67

---

#### Standards & regulation

EN50131 grade	Grade 3
---------------	---------

---

