

DC408R4.7


Industrial floor mount contact for garage door, high security grade 3, grey with 4k7 EOL resistor

Requirements for grade 3 magnetic contacts

The grade 3 magnetic contacts are high security contacts which do meet the following requirements: preciseness of opening distance, magnet polarisation, strength of the magnet

Model with built in EOL resistors available

Though built in EOL resistors are not mandatory according to EN50131-2.6 requirements, Interlogix offers a model with built in EOL resistors for a quick installation (see how to Order information)

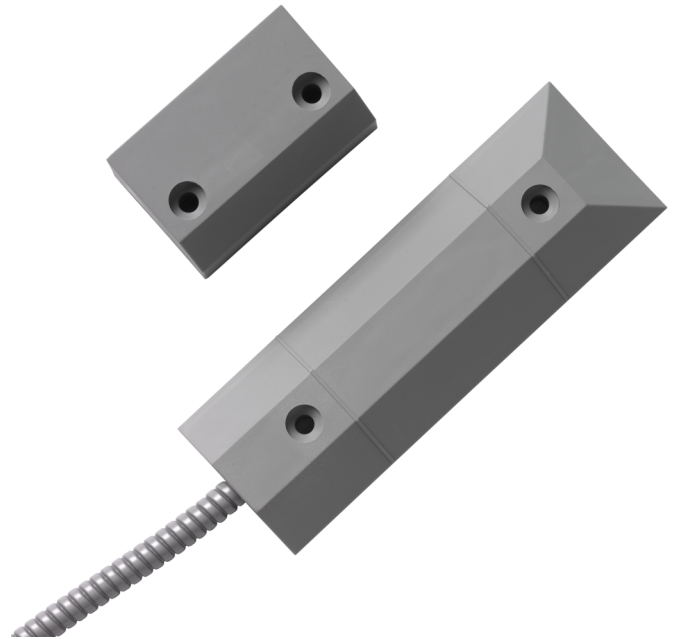

Details

- EN 50131-2-6 Grade 3 and VDS certified
- 2m cable
- Tamper protected
- built in 4k7 EOL resistor

DC408R4.7

Industrial floor mount contact for garage door, high security grade 3, grey with 4k7 EOL resistor

Technical specifications

General

Application type	Surface Mount
Contact type	4K7 end-of-line resistor
Connectivity	LIYY 4 x 0.14 mm Cu tin-plated; Suitable for LSA IDC method of termination

Wired/wireless

Wired-wireless	Wired
----------------	-------

Electrical

Voltage	max 100V DC
Contact power	max 6W or 6 VA
Switching current	max 500mA
Contact resistance	max 0.15 Ohm

Physical

Physical dimensions	66 x 40 x 35 mm
Colour	Grey
Material	Polyamid GF
Dimensions magnet	12 x 55 mm
Dimensions contact / sensor	144 x 50 x 16.5 mm
Operating gap	34 mm

Environmental

Operating temperature	-25 to 70°C
Environment	VdS ; Class III - Outdoor (Sheltered)
IP rating	IP67

Standards & regulation

EN50131 grade	Grade 3
---------------	---------

