

# R1125-N

**Order In Multiples Of 10, "Stubby" press-fit recessed mount contact with "Mini-Max" magnet, white**

## Stubby "Press-Fit" contact

The Sentrol R1125 series "Stubby" Press-Fit magnetic contacts are a 9 mm switch designed specifically for applications where space is limited. The short length makes it ideal for thin-framed windows and doors where longer units cannot be used. Press fit ribs on the housing make for quick, easy installation. The Mini-Max magnet can be fitted where almost no space is available to mount a normal magnet.

## Easy installation

Switch is hermetically sealed reed switch, which is potted using exclusive polyurethane potting compound into the switch housing. Switch is drill-mounted in wood or aluminum with a suitable adhesive. The Alnico V Mini-Max magnet mounts with adhesive tape or a stainless steel screw. The switch housing has three fins to press-fit against the mounting hole.

## Durability and dependability

The Sentrol high performance magnetic contacts have been designed to facilitate installation and ensure durability and dependability. Most are conservatively rated at 10,000,000 cycles, guaranteeing a long life. Every reed connection is hand soldered and each magnetic contact is tested before they leave the factory, 100% of the time.

## High quality components and materials

Reed legs are plated with rhodium or ruthenium, and hermetically sealed in dry nitrogen. This offers superior protection against sticking and provides a moisture free environment therefore preventing corrosion.



## Details

- Rare-earth magnet technology delivers powerful magnetic force
- Ideal for PVC windows and doors
- Easy to install in any situation
- Magnet mounts easily with glue, double-sided tape, or stainless-steel screw

# R1125-N

Order In Multiples Of 10, "Stubby" press-fit recessed mount contact with "Mini-Max" magnet, white

## Technical specifications

### General


|                  |                |
|------------------|----------------|
| Application type | Recessed Mount |
| Contact type     | NC             |
| Connectivity     | 2 wires, 30 cm |

### Wired/wireless

|                |       |
|----------------|-------|
| Wired-wireless | Wired |
|----------------|-------|

### Physical

|                             |                   |
|-----------------------------|-------------------|
| Colour                      | White             |
| Diameter                    | 9 mm              |
| Dimensions magnet           | 9 x 3 mm (Ø x L)  |
| Dimensions contact / sensor | 9 x 19 mm (Ø x L) |
| Operating gap               | 13 mm (max.)      |

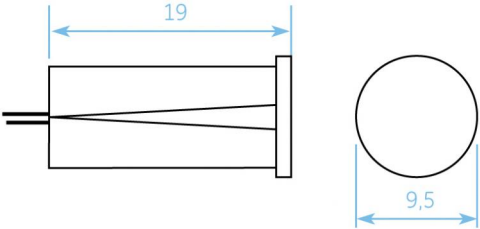

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](https://firesecurityproducts.com) online or contact your sales representative.

Last updated on 26 February 2021 - 14:48