Product data sheet



SB4200-N

AIR four-beam detector 120-200 m (depending on visibility), with integrated Heater and Alignment tool

The new SB active infrared beams' series includes two-beam and fourbeam detectors, which generate an alarm when 1 or 2 beams are interrupted, ignoring birds, small animals, dead leaves, etc.

They consist of two identical detector modules equipped with detector cells integrating both transmission and reception functions. These modules are installed facing each other over the distance to be protected providing a non-physical invisible detection zone.

Detectors are based on a system of pulsed infrared beams, and operate on four user-selectable frequencies (channels), which allow avoiding any risk of interference between detectors.

Thanks to an integrated alignment tool, which provide visual and audible signal, beams are much quicker and easier to align. Heater is also integrated on the beams.





Details


- 4 active infrared (AIR) beams
- Outdoor range 120-200 m (depending on visibility)
- 4 selectable channels
- On board regulated heater
- Disqualification
- Integrated alignment tool (visual/audio)
- Receiver and Transceiver in one module
- Modular pillar for 180° & 360° view
- Very strong pillars up to 3 m

SB4200-N

AIR four-beam detector 120-200 m (depending on visibility), with integrated Heater and Alignment tool

Technical specifications

General	
Category	Active Infrared Beams
Product type	Active Infrared Beam
Infrared system	4-beam LED
Tamper	NC
Detection	
Range	120 to 200 / 250 m (outdoor / indoor)
Alarm response time	50 to 800 ms
Disqualification respons time	e60 s non-adjustable
Inputs/outputs	
Alarm output	NC
Supervision output	NO
Electrical	
Power supply value	10 to 15 VDC (heater supports VDC / VAC)
Current consumption	55 mA (1 module)
Physical	
Physical dimensions	84 x 390 x 113 mm
Net weight	1.2 kg
Environmental	
Operating temperature	- 25 to +55°C
Environment	Outdoor
IP rating	IP44

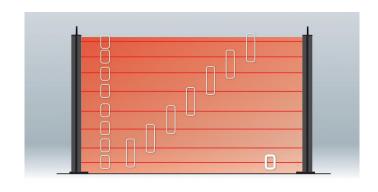



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.