


WC114W

Shielded Composite 2 + 12 Cable 2 x 0.75

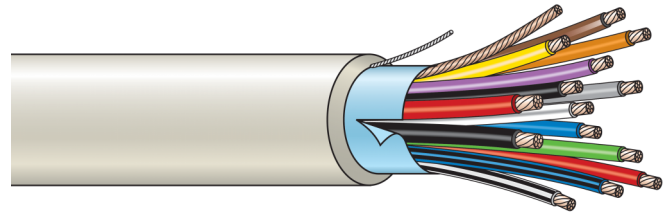

Details

- For internal or external wiring of warning network systems
- Manufactured in accordance with BS4737 section 3.30
- Suitable for gluing to surfaces
- High quality PVC

WC114W

Shielded Composite 2 + 12 Cable 2 x 0.75

Technical specifications

Shielding

Shielded	Yes
----------	-----

Core

Conductor size	0.22 mm ² (data) - 0.75 mm ² (power)
Conductor material	Plain copper
Wire colours	Red, Black (power) Blue, White, Yellow, Green, Grey, Brown, Red, Orange, Black, Violet, Blue-black, White-black (data)

Jacket

Jacket colour	White
Jacket thickness	Min. 0.45 mm ² - max. 0.7 mm ²

Electrical Characteristics

Current rating	1 A
Max.conductor DC resistance	92.4 ohm/km @ +20°C
Nominal (mutual) capacitance	90 pF/m

Physical

Cable length	100 m
No. of wires	14

Environmental

Halogen free	Yes
--------------	-----

Standards & Regulation

Compliancy	CE
------------	----



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 23 July 2021 - 9:46