


AD600

Plug-in module DD600

The AD600 IADS module is supported by the ATS1290N DGP, and designed to be installed directly on the terminal block of the DD600 series (standard as well as AM variants).

A 3 core connection only is required to the ATS1290N DGP / ATS Master panel.

As the AD600 acts as I/O interfaces with one dual-zone input and two outputs, it is necessary to program anti-masking detectors to signal a technical fault or antimasking condition to the alarm output.

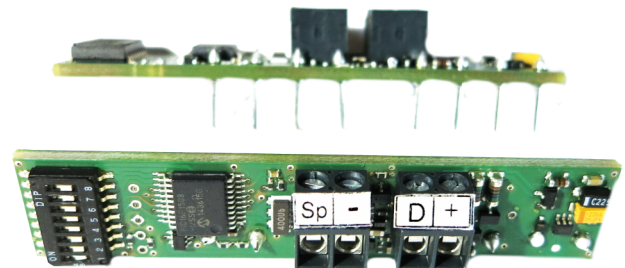

Details

- Helps reduce installation time
- Up to 32 addresses can be set
- Fits into motion sensor connector block
- Supported by ATS1290N DGP

AD600

Plug-in module DD600

Technical specifications

General

| | |
|-----------------|----------------|
| Accessory group | Motion sensors |
| Type | Module |

Electrical

| | |
|---------------------|------------------|
| Operating voltage | 9 to 24 VDC |
| Current consumption | max. 900 μ A |

Supply voltage

| | |
|--|----------------------------|
| | 9 to 24 VDC (12 V nominal) |
|--|----------------------------|

IADS-bus voltage

| | |
|--|--------------|
| | 12 or 24 VDC |
|--|--------------|

Min. current consumption at 13.4 VDC

| | |
|--|-------------|
| | 400 μ A |
|--|-------------|

Max. current consumption at 13.4 VDC

| | |
|--|-------------|
| | 900 μ A |
|--|-------------|

Bus current consumption out of bus

| | |
|--|--------------------|
| | approx. 75 μ A |
|--|--------------------|

Max. current capacity output day/night

| | |
|--|--------|
| | 200 mA |
|--|--------|

Max. current capacity output walk test

| | |
|--|--------|
| | 200 mA |
|--|--------|

Device type / Category

| | |
|--|----------|
| | T3 / PIR |
|--|----------|

Address range

| | |
|--|---------|
| | 0 to 31 |
|--|---------|



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 26 March 2021 - 12:51